

15-CD45

QTY/CTN: 12



Colour SONY Super HAD CCD High Resolution Fixed Lens Dome 12V / 24V
550TVL, 1/3" SONY Super HAD CCD, SHQ1, 0.15 Lux, 3.6mm fixed iris Lens,
AGC, AWB, BLC, Mirror, 3-Axis Gymbal, Camera board made in Japan,
12VDC / 24VAC operation.

FEATURES

- 1/3" SONY super HAD CCD
- SHQ1, 550 TV lines, 0.15 Lux**
- Mini fixed iris lens 3.6 mm
- Auto gain control (AGC)
- Back Light Compensation (BLC)
- Auto white balance control (AWB)
- Mirror picture function
- Camera board mounted in 3-Axis gymbal
- Surface mount
- Power input 12VDC / 24VAC
- PAL or NTSC system



15-CD45VA

QTY/CTN: 12



Colour SONY Super HAD CCD High Resolution Varifocal Lens Dome 12V / 24V
550TVL, 1/3" SONY Super HAD CCD, SHQ1, 0.15 Lux, 3.7~12mm varifocal
Auto Iris Lens, AGC, BLC, AWB, Mirror, 3-Axis Gymbal, Camera board
made in Japan, 12VDC / 24VAC operation.

FEATURES

- 1/3" SONY super HAD CCD
- SHQ1, 550 TV lines, 0.15 Lux**
- Built-in varifocal auto iris lens 3.7~12 mm
- Auto gain control (AGC)
- Auto white balance control (AWB)
- Back light compensation (BLC)
- Mirror picture function
- Camera board mounted in 3-Axis gymbal
- Anti-drop wire for bubble cover
- Surface mount
- Power input 12VDC / 24VAC
- PAL or NTSC system



15-CD45VAC

QTY/CTN: 12




Colour / Monochrome SONY Super HAD CCD, SHQ1, Varifocal Lens Dome 12V / 24V
550TVL, 1/3" SONY Super HAD CCD, SHQ1, 0.001 Lux, TAMRON 3.7~12mm lens,
IR cut, Auto Iris Lens, Line lock, Auto gain control with Super AGC Function,
Backlight compensation, DNR (Digital Noise Reduce), H-mirror, Flickerless,
3-Axis Gymbal, Camera board made in Japan, 12VDC or 24VAC operation.

FEATURES

- 1/3" SONY super HAD CCD
- SHQ1, 550 TV lines, 0.001 Lux**
- Built-in TAMRON varifocal auto iris lens 3.7~12 mm**
- Super auto gain control (AGC)
- Auto white balance control (AWB)
- Back light compensation (BLC)
- IR cut removable, line lock**
- Mirror picture function
- Flickerless, DNR
- Camera board mounted in 3-Axis gymbal
- Anti-drop wire for bubble cover
- Surface mount
- Power input 12VDC/24VAC
- PAL or NTSC system



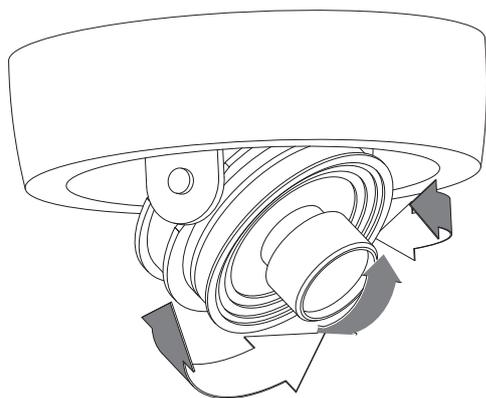

3-Axis Rotation



Easy Installation

SPECIFICATION

Items	15-CD45	15-CD45VA	15-CD45VAC
Type		Colour	Colour / Monochrome
Pick Up Device	1/3" SONY Super HAD CCD, SHQ1 DSP		
Picture Elements	NTSC: 768(H) x 494(V); PAL: 752(H) x 582(V)		
Horizontal Resolution	550 TV Lines		
Vertical Frequency	NTSC: 60Hz; PAL: 50Hz		
Scanning System	2 : 1 Interlace		
Mini Illumination	0.15 Lux		0.001 Lux
S/N Ratio	≥50dB		
Electronic Shutter	NTSC: 1/60~1/120,000sec ; PAL: 1/50~1/120,000sec		
Iris	Fix	Auto	
White Balance	Auto		
Black Light Compensation	On / Off		
Gain Control	Auto		
Gamma	0.45		
Video Output	1Vp-p Composite Video (75Ω)		
Lens	3.6 mm / F2.0	Varifocal auto iris 3.7~12 mm	
Power Supply	DC12V / AC24V		
Power Consumption	150mA		180mA
Dimensions	ø136(D) x 100(H) mm		
Weight	375 g	405 g	387 g
Storage Temperature	-30°C ~ 60°C		
Operation Temperature	-10°C ~ 45°C		