


Weatherproof IR Colour Camera

● ITEM No: CIR-BB32FB(940)

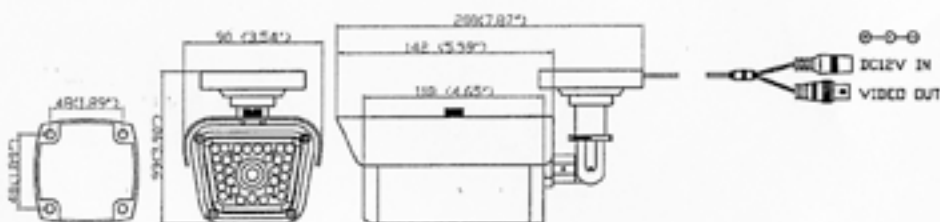

● Caution for Installation

1. In order to prevent electronic shock and/or destroy waterproof, don't loosen any screws and/or covers.
2. Adjust the sunshade cover to avoid sunlight shoot the lens directly.
3. Do not directly touch the front glass. If necessary, use a soft cloth moistened with alcohol to wipe off the dust.
4. Avoid places where there are frequent vibrations or shocks.
5. Don't operate the camera beyond its temperature, power source ratings.
6. When any abnormalities happen, make sure to unplug the camera and contact your local dealer.

● Packing

- | | |
|---------------------------|----|
| 1. Camera | X1 |
| 2. User Manual | X1 |
| 3. Screw | X4 |
| 4. Plastic-Conical-Anchor | X4 |
| 5. Hexagonal Wrench | X2 |
| 6. Mounting drawing paper | X1 |
| 7. DC Connector | X1 |

● Specification

| ITEM | CIR-BB32FB(940) |
|-------------------------|---|
| IP Rating | IP66 |
| Type | Colour/Monochrome |
| Signal System | NTSC/PAL |
| Pick Up Device | 1/3" Colour Super Sensitivity CCD |
| Picture Elements | NTSC:811H×508V PAL:795H×596V |
| Resolution | 520 TV Line |
| Min Illumination | 0Lux (30Pieces IR LED ON) |
| Vertical Frequency | NTSC:60Hz PAL:50Hz |
| Horizontal Frequency | NTSC:15.734KHz PAL:15.625KHz |
| Clock Frequency | NTSC:28.636MHz PAL:28.375MHz |
| Scanning System | 2:1 Interlace |
| S/N Ratio | ≥50dB |
| Electronic Shutter | NTSC:1/60-1/100,000s PAL: 1/50-1/100,000s |
| Lens | 6mm Board Lens |
| White Balance | AUTO Tracking |
| Back Light Compensation | ON |
| Auto Gain Control | ON |
| GAMMA | 0.45 |
| Video Out-put | 1V p-p,75 Ω |
| Power Supply | DC12V ±10% |
| Current Consumption | 300mA (Max) |
| IR Effect Distance | 14m (45.9ft) (Outdoor) |
| Dimension | 200×99×90mm(7.87"×3.90"× 3.54") |
| Weight | 750g (26.5oz) |
| Storage Temperature | -30~+60°C (-22~+140°F) |
| Operating Temperature | -30~+40°C (-22~+104°F) |

Remark: Non-regulative adaptor may cause camera damaged.